



ITT

Residential Water Systems

Goulds Pumps

1SC Submersible Water Pump



FEATURES

- **Casing:** AISI 304 SS. Corrosion resistant, non-toxic, non-leaching.
- **Impeller:** FDA compliant, glass filled Noryl®. Corrosion and abrasion resistant.
- **Mechanical Seal:** Silicon/carbide sealing faces; all metal components of AISI type 300 stainless steel running in protected oil chamber.
- **Elastomers:** BUNA-N.
- **Motor Shell and Lifting Handle:** Constructed of AISI type 304 series stainless steel.
- **Shaft:** AISI type 304 stainless steel high strength keyed pump shaft with impeller locking cap screw.
- **Discharge:** 1¼" NPT vertical discharge connection.
- **Suction Strainer:** Detachable for easy clean out.



Goulds Pumps is a brand of ITT
Residential and Commercial Water.

www.goulds.com

Engineered for life

910.805.2198

www.EnvironmentalRainwaterSolutions.com



ITT

GOULDS PUMPS Residential Water Systems

APPLICATIONS

Submersible water pumps designed for pumping out of reservoirs and storage tanks:

- Homes and farms
- Mobile home parks and motels
- Schools and hospitals
- Municipal applications
- Industrial applications
- Commercial applications

SPECIFICATIONS


Pump:


- 1 1/4" NPT discharge and open suction.
- Maximum suspended solids 1/8".
- Capacities: to 35 U.S. GPM (7.9 m³/h).
- Total heads: to 240 feet TDH (70 m).
- Temperature:
104°F (40°C) continuous
140°F (60°C) intermittent.

- Maximum submergence: to 65 feet (20 m).
- Continuous duty rated, non-overloading motor.

Motor:

- **Single phase:** 3450 RPM, 115 and 230 V, 60 Hz.
- **Three phase:** 3450 RPM, 230 V, 60 Hz.
- Non-overloading.
- Class F insulation.
- Thermal overload protection: built-in with automatic reset on single phase.
- Three phase models require external overloads in panel.
- **Power cord:** 30' long with BARE leads for control panel connection.
Single phase – 16/4 SJTO
Three phase – 16/4 STO
- **NOTE:** See accessory section for separate control panels.
- Capacitor box, single phase models are supplied with a capacitor box and molded NEMA plug.

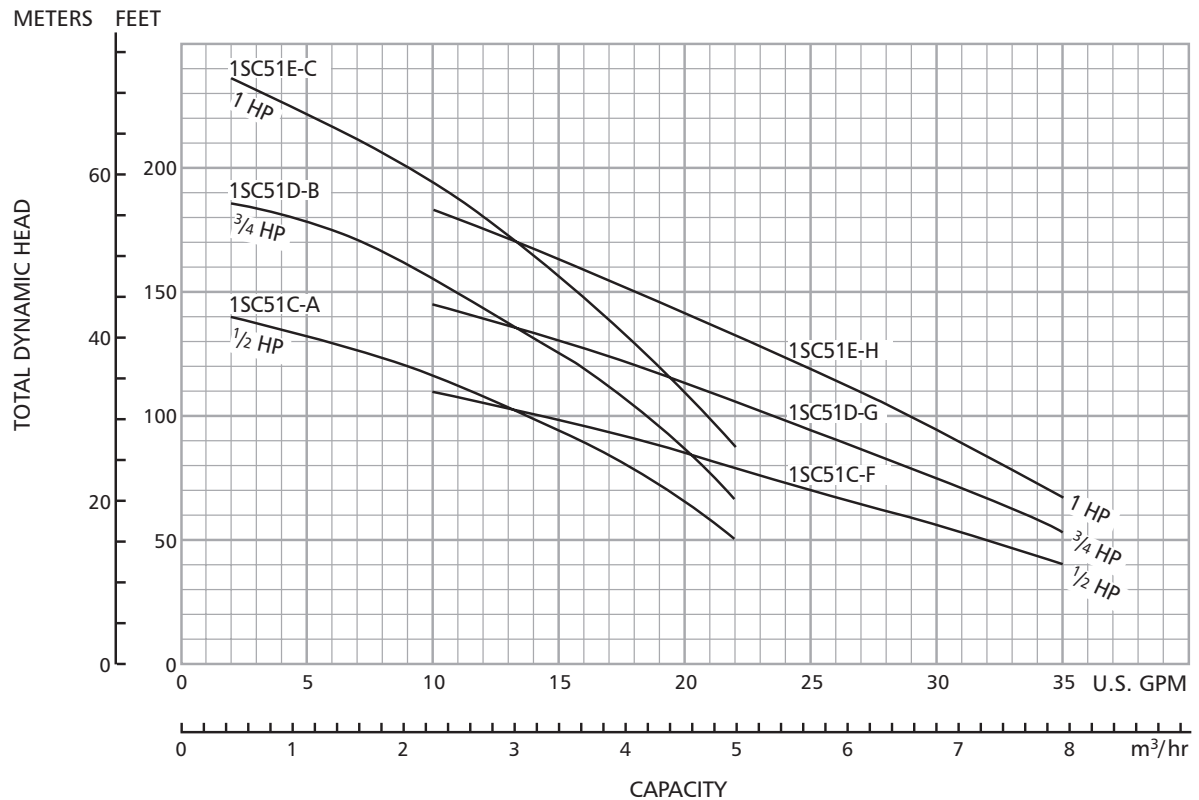




ITT

GOULDS PUMPS
Residential Water Systems

MECHANICAL DATA

Series	Number of Stages	HP	Volts	Phase	Maximum Amps	RPM	Weight (lbs.)	
1SC51C0AA	3	½	115	1	10.6	3450	31	
1SC51C1AA			230		4.5			
1SC51C3AA			3	3.0				
1SC51C0FA		½	115	1	10.7			33
1SC51C1FA			230		4.5			
1SC51C3FA			3	3.0				
1SC51D1BA	4	¾	230	1	5.4		38	
1SC51D3BA				3	3.5			
1SC51D1GA				1	5.3			
1SC51D3GA				3	3.5			
1SC51E1CA	5	1	230	1	6.4		38	
1SC51E3CA				3	4.1			
1SC51E1HA				1	6.8			
1SC51E3HA				3	4.3			

DIMENSIONS

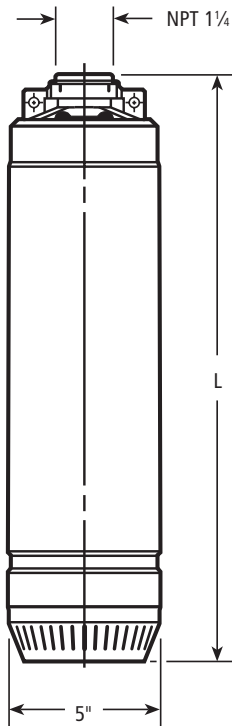

Series	HP	Phase	"L" Dimensions in inches	Discharge Size
1SC	½	1,3	19⅞	1¼
	¾	1,3	20⅞	
	1	1,3	21¾	



ITT

Residential Water Systems

Component	Material
Outer Casing and Upper Support	Stainless Steel (AISI 304)
Motor Casing	Stainless Steel (AISI 304)
Suction Strainer	Stainless Steel (AISI 304)
Motor Shaft	Stainless Steel (AISI 304)
Impeller	Noryl
Diffuser	Stainless Steel (AISI 304)
Upper Cover	Technopolymer
Mechanical Seal Housing	Technopolymer
Lower Bearing Support	Aluminum Die Cast
Lower Bearing	Urethane Resin
Elastomers	Buna-N
Lower Mechanical Seal	Silicon Carbide/Silicon Carbide
Upper Lip Seal	Nitrile Rubber



Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation.

Noryl is a registered trademark of GE Plastic.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

B1SC August, 2006
© 2006 ITT Corporation

Engineered for life